
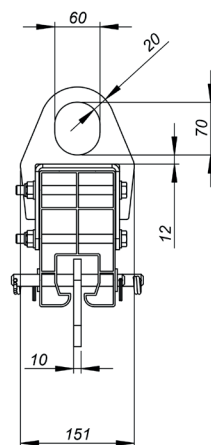


Artikelcode	Lengte (m) L	Verstelbaar (mm) S	Werklast (kg) Q	Gatafstand in verstelbare balk (mm) M	Aantal verstelbare gaten (een kant) N	Gewicht zonder sluitingen en haken (kg)
FP-TRA-100-R	1	0,9 / 0,7 / 0,5	2000	100	3	9,5
FP-TRA-200-R	2	1,9 / 1,6 / 1,3 / 0,7	1750	150	5	16,0
FP-TRA-300-R	3	2,9 / 2,5 / 2,1 / 1,7 / 1,3 / 0,9	1250	200	6	22,6
FP-TRA-400-R	4	3,9 / 3,4 / 2,9 / 2,4 / 1,9 / 1,4 / 0,9	750	250	7	29,1
FP-TRA-500-R	5	4,9 / 4,3 / 3,7 / 3,1 / 2,5 / 1,9 / 1,3	500	300	7	35,7

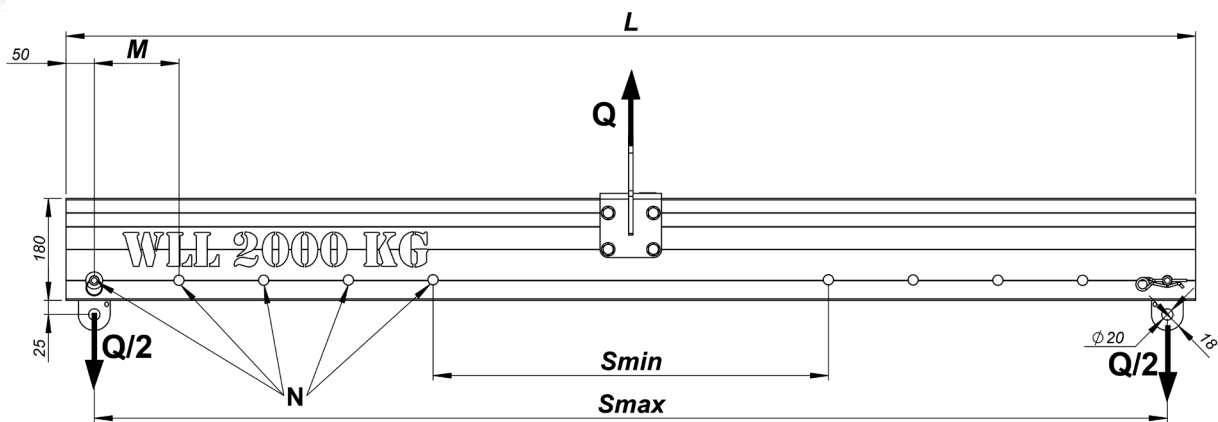

Article code	Length (m) L	Beam span range (mm) S	WLL (kg) Q	Hole spacing in adjustable beam (mm) M	Number of adjustable holes (one side) N	Beam weight without hooks and shackles (kg)
FP-TRA-100-R	1	0,9 / 0,7 / 0,5	2000	100	3	9,5
FP-TRA-200-R	2	1,9 / 1,6 / 1,3 / 0,7	1750	150	5	16,0
FP-TRA-300-R	3	2,9 / 2,5 / 2,1 / 1,7 / 1,3 / 0,9	1250	200	6	22,6
FP-TRA-400-R	4	3,9 / 3,4 / 2,9 / 2,4 / 1,9 / 1,4 / 0,9	750	250	7	29,1
FP-TRA-500-R	5	4,9 / 4,3 / 3,7 / 3,1 / 2,5 / 1,9 / 1,3	500	300	7	35,7