


ELLER MINI CHAIN HOIST

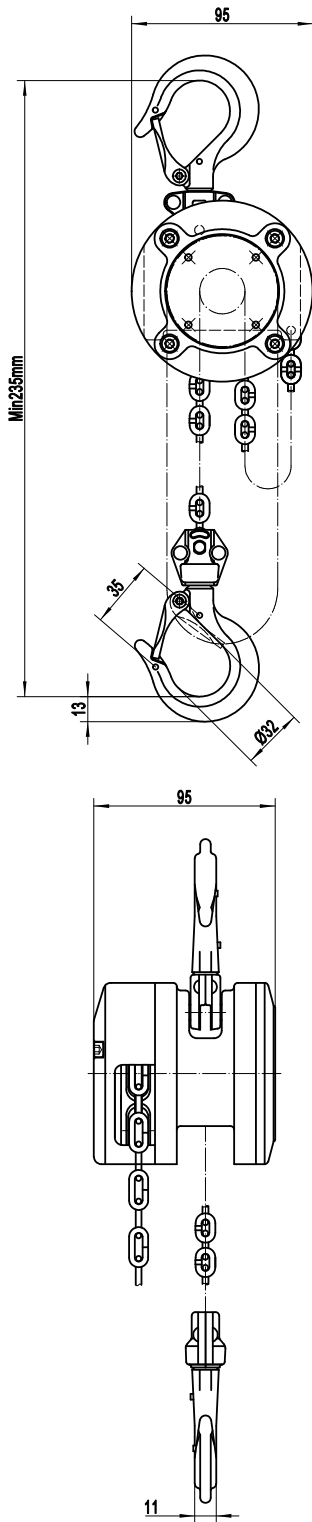

STANDARD FEATURES

- Lifting capacity: 250 kg
- Dual Pawl ratchet for increased safety
- Small pocket-sized format
- Aluminium body fitted with countersunk bolts
- Only 2.4 kg net weight
- Compact construction: a minimal height of 235 mm
- Low hand-pull force for easy operation
- Overload limiter
- Wide hook opening
- Hook latch with safety tip
- Small chain pitch for precise lifting movements
- Grade 10 calibrated load chain in accordance with standard EN 818-7.

USAGE

- Minimal overall height – extremely compact and lightweight design
- Millimetre-accurate lifting movements and low manual operating force thanks to finetoothed precision gearing
- High safety - overload protection as standard equipment




ARTIKELCODE	WLL (T)	NO. OF FALLS	LOAD CHAIN (MM)	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	F (MM)	G (MM)	MASS (KG)
ELHTM	250	1	3.2x9.0	95	95	235	13	11	35	Ø32	2.5



The 250 kgs aluminium hand chain hoist is the smallest and lightest of the ELLER hand chain hoists. This is ideal for use at height in industries such as the theatre and entertainment sectors or wherever lifting is required with ease of handling, portability and reliability.

ELLER HANDKETTINGTAKEL MINI

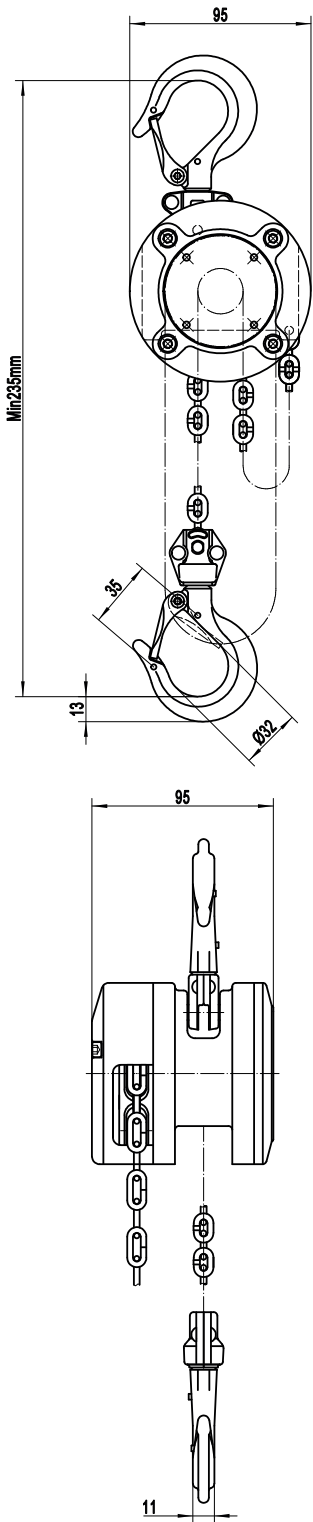

STANDAARDEIGENSCHAPPEN

- Hijscapaciteit: 250 kg
- Standaard met 10 meter hijshoogte
- Aluminium (zwart gecoate) behuizing voorzien van verzonken bouten
- Minimale hoogte van 235 mm
- Standaard uitgevoerd met overlastbeveiliging
- Brede haakopening
- Fijne tandwielen voor precieze hijsbewegingen
- Grade 10 gekalibreerde lastketting volgens de norm EN 818-7.

GEBRUIK

- Lage trekkracht voor eenvoudige bediening
- Uiterst compact en lichtgewicht ontwerp – minimale bouwhoogte van 235mm
- Millimeternauwkeurige hijsbewegingen en lage handmatige bedieningskracht dankzij de fijn-getande precisie tandwielen.
- Hoge veiligheid – standaard uitgevoerd met overlastbeveiliging.



ARTIKELCODE	WERKLAST (T)	AANTAL STRENGEN	LAST KETTING (MM)	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	F (MM)	G (MM)	GEWICHT (KG)
ELHTM-00250-100-095-Z	0,25	1	3.2x9.0	95	95	235	13	11	35	Ø32	7.3